


## BAS Remote Versatile Building Automation Appliance

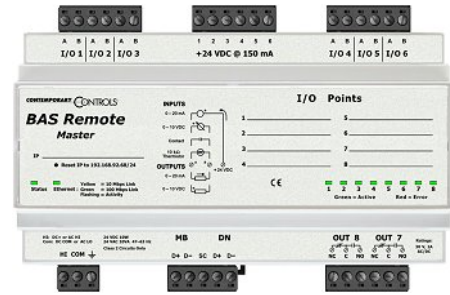

### BACnet Protocol Implementation Conformance Statement (Annex A)

Date: 18 January 2010

Vendor Name: Contemporary Controls

Product Name: BAS Remote

Product Model Number: BASR-8M

Applications Software Version: Firmware Revision: 3.0 BACnet Protocol Revision:

Product Description: BACnet/IP compliant 8-point remote input/output device that allows a direct connection to Ethernet without the need of a BACnet router.

**BACnet Standardized Device Profile (Annex L):**

- BACnet Operator Workstation (B-OWS)
- BACnet Building Controller (B-BC)
- BACnet Advanced Application Controller (B-AAC)
- BACnet Application Specific Controller (B-ASC)
- BACnet Smart Sensor (B-SS)
- BACnet Smart Actuator (B-SA)

**List all BACnet Interoperability Building Block Supported (Annex K):**

- DS-RP-B Data Sharing — ReadProperty — B
- DS-WP-B Data Sharing — WriteProperty — B
- DS-RPM-B Data Sharing — ReadPropertyMultiple — B
- DS-COV-B Data Sharing — ChangeOfValue — B
- DM-DDB-B Device Management — Dynamic Device Binding — B
- DM-DOB-B Device Management — Dynamic Object Binding — B
- DM-DCC-B Device Management — Device Communication Control — B
- DM-TS-B Device Management — Time Synchronization — B

**Segmentation Capability:**

- Able to transmit segmented messages Window Size:
- Able to receive segmented messages Window Size:

**Standard Object Types Supported:**

Object Type Supported	Can Be Created Dynamically	Can Be Deleted Dynamically
Analog Input	No	No
Analog Output	No	No
Analog Value	No	No
Binary Input	No	No
Binary Output	No	No
Device	No	No

No optional properties are supported.

**Data Link Layer Options:**

- BACnet IP, (Annex J)
- BACnet IP, (Annex J), Foreign Device
- ANSI/ATA 878.1, EIA-485 ARCNET (Clause 8), baud rate(s):
- MS/TP master (Clause 9), baud rate(s):
- MS/TP slave (Clause 9), baud rate(s):
- Point-To-Point, EIA 232 (Clause 10), baud rate(s):
- Point-To-Point, modem, (Clause 10), baud rate(s):
- LonTalk, (Clause 11, medium):
- Other:

**Device Address Binding:**

Is static device binding supported? (This is currently necessary for two-way communication with MS/TP slaves and certain other devices.)  Yes  No

**Networking Options:**

- Router, Clause 6 – List all routing configurations, e.g., ARCNET-Ethernet-MS/TP, etc.
- Annex H, BACnet Tunnelling Router over IP
- BACnet/IP Broadcast Management Device (BBMD)  
Does the BBMD support registrations by Foreign Devices?  Yes  No

**Character Sets Supported:**

Indicating support for multiple character sets does not imply that they can all be supported simultaneously.

- ANSI X3.4
- IBM™/Microsoft™ DBCS
- ISO 8859-1
- ISO 10646 (UCS-2)
- ISO 10646 (UCS-4)
- JIS C 6226

If this product is a communication gateway, describe the types of non-BACnet equipment/network(s) that the gateway supports:

Modbus gateway support.