


data SHEET

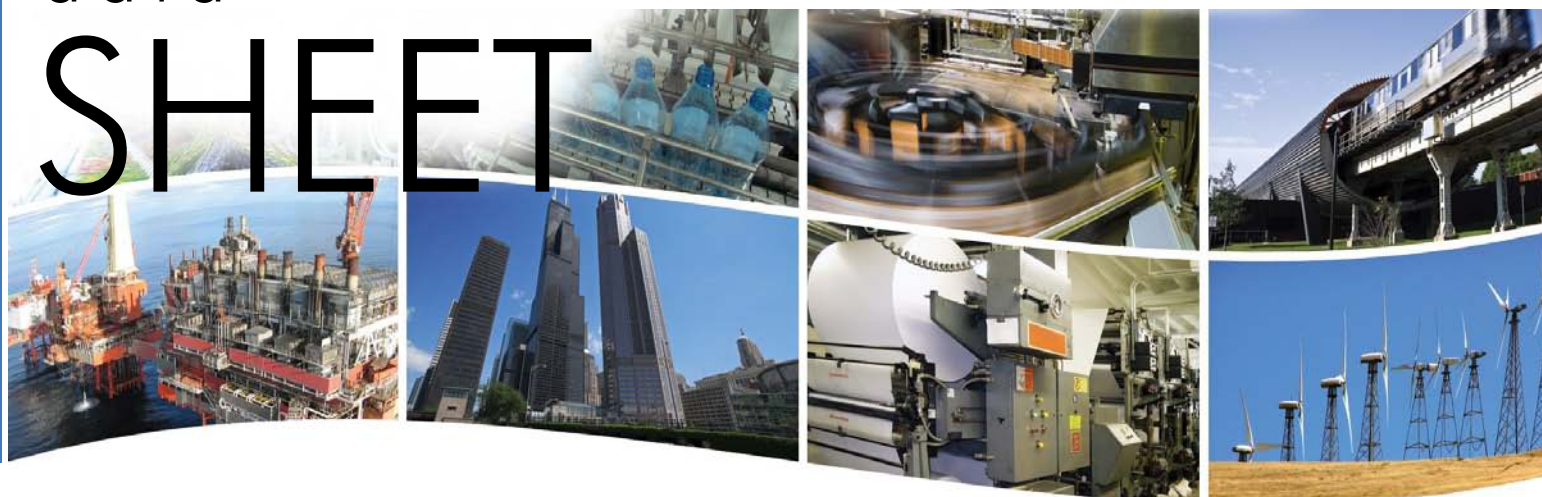

8-Port Skorpion Gigabit Switch — Now with PoE! Cost Effective, High-speed — Compact Size

The EISK8P-GT Skorpion Gigabit Switch is an 8-port unmanaged Ethernet switch with Gigabit Ethernet (GigE) performance on all ports and Power-Over-Ethernet (PoE) on four ports. GigE jumbo frames up to 9216 bytes are supported for maximum system performance. For 10/100 Mbps legacy devices, its port speed automatically slows — accommodating any Ethernet automation system. This low-cost compact unit has a rugged metal enclosure and is intended for DIN-rail mounting in control panels.


Ports 5 – 8 PoE provide data and power over one Cat5e cable. The unit acts as power sourcing equipment (PSE) — supplying up to 15.4 W per port for IEEE 802.3af-compliant powered devices (PD). PoE eliminates the need for additional power supplies for

Ethernet-enabled devices placed in challenging locations — such as wireless access points or IP cameras mounted out of reach or outdoors. PDs can be located up to 100 metres from the switch.

This plug-and-play switch requires no configuration. All ports automatically configure data rate and duplex using the Auto-negotiation protocol. Depending on the capability of the link partner, communication is set at 10, 100 or 1000 Mbps at either half- or full-duplex. All ports accommodate either crossover or straight-through cable via the Auto-MDIX protocol.

The unit is powered from 48 VDC. LED indicators assist in troubleshooting network issues.

- Plug-and-Play operation
- 4 PoE ports deliver up to 15.4 W each
- 10BASE-T/100BASE-TX/1000BASE-T
- Shielded RJ-45 connectors
- Auto-negotiation of speed and duplex
- Auto-MDIX supports crossover cables
- LEDs for link/activity, data rate, power, and PoE status

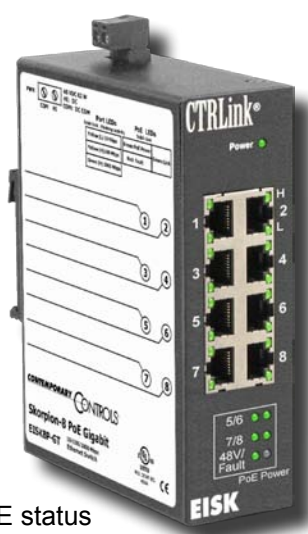

- DIN-rail mounting
- Rugged metal enclosure
- Diagnostic LEDs
- Enhanced EMC compliance
- CE Mark compliant, RoHS compliant
- 48 VDC powered

CTRLink®

Overview


The Skorpion Gigabit Switch is intended for control panel installations where DIN-rail space is at a premium by requiring a width of only 41 mm of rail space. A metal DIN-rail clip attached to the aluminium enclosure can survive the toughest installation. A writable side label allows the installer an opportunity to document field cabling locations right on the unit.

The switch is powered from an external 48 VDC isolated power supply. A removable power connector

facilitates the servicing of the unit.

LEDs built into the connector indicate data rate and activity on each of the eight ports — greatly assisting in troubleshooting connection issues.

The switch is UL 508 Listed and c-UL Listed for Industrial Control Equipment. It complies with CFR 47 Part 15 Class A, and carries the CE Mark. It is RoHS compliant.

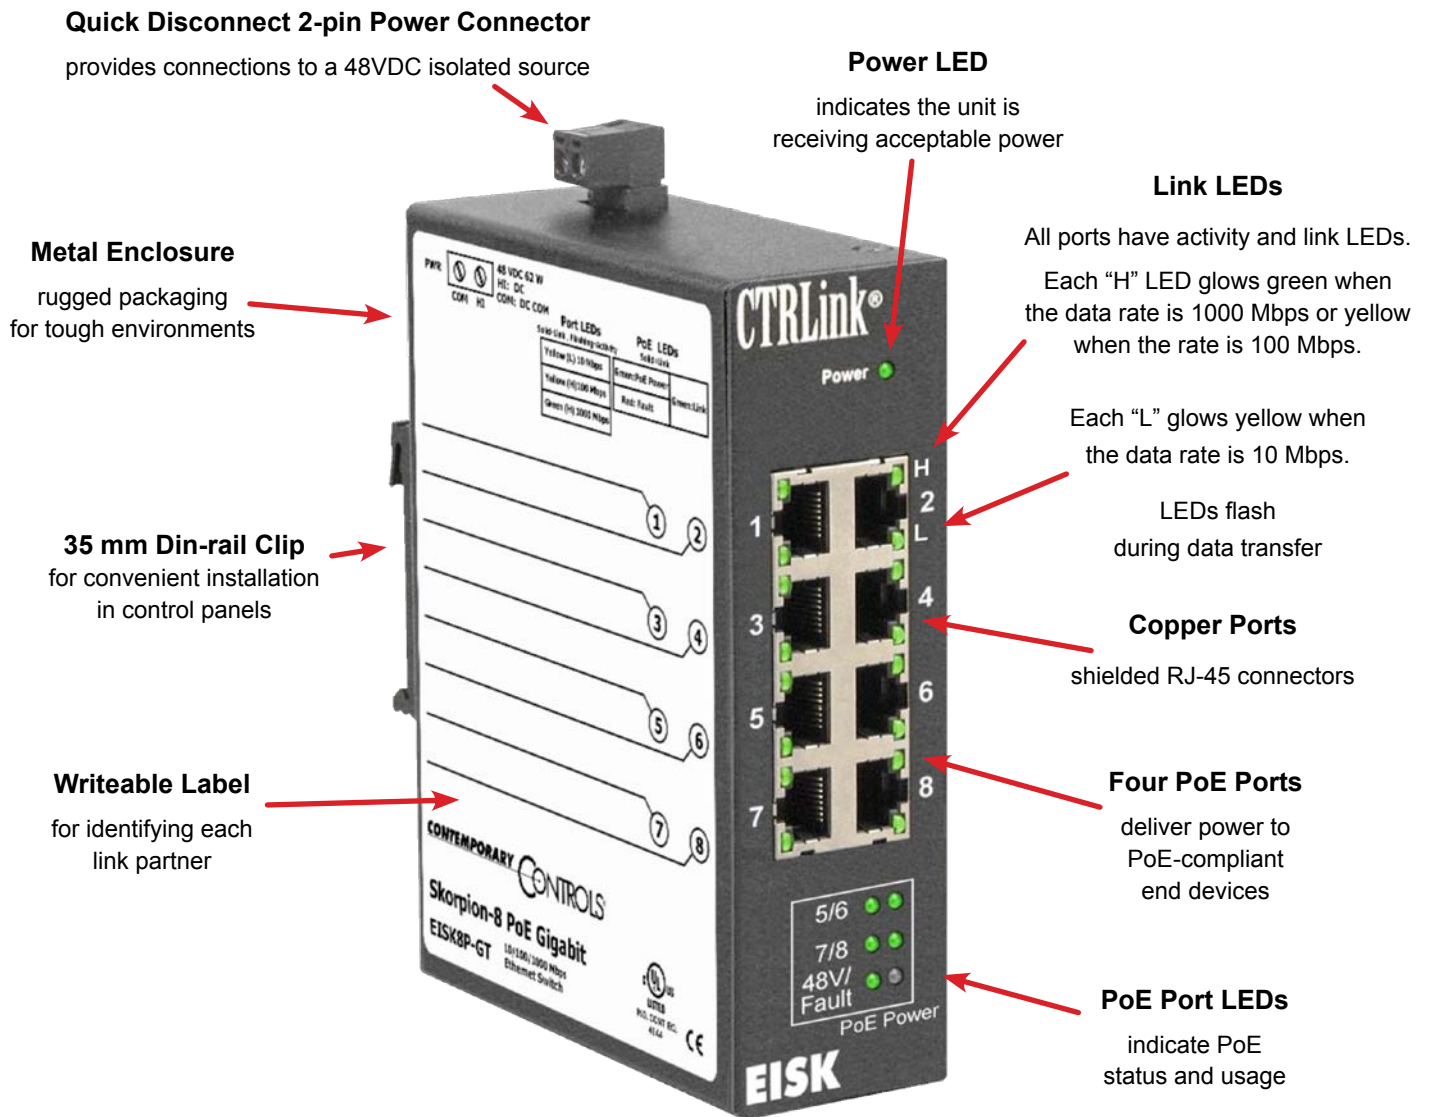


Specifications

Power Requirements	48 VDC ±5% isolated, 62 W (all PoE ports used) or 5 W (no PoE ports used) Class 2 circuits only												
Power to Each PoE Port	48 VDC, 15.4 W (12.95 W min after 100m of Cat5e cable)												
Operating Temperature	0°C to 60°C												
Storage Temperature	-40°C to 85°C												
Relative Humidity	10–95%, non-condensing												
Protection	IP30												
Mounting	TS-35 DIN-rail												
Shipping Weight	1 lb (0.45 kg)												
Ethernet Communications	IEEE 802.3af 10/100/1000 Mbps data rate using RJ-45 connectors, 100 m (max) Supports jumbo frames up to 9216 bytes												
LEDs	<table border="0"> <tr> <td>Power</td> <td>Green = internal power OK</td> </tr> <tr> <td>48V</td> <td>Green = 48 V PoE power OK</td> </tr> <tr> <td>Fault</td> <td>Red = PoE power fault</td> </tr> <tr> <td>“H” LEDs</td> <td>Green = 1000 Mbps communication established Yellow = 100 Mbps communication established</td> </tr> <tr> <td>“L” LEDs</td> <td>Yellow = 10 Mbps communication established</td> </tr> <tr> <td>“H” or “L” LEDs</td> <td>Flashing = data transmissions occurring</td> </tr> </table>	Power	Green = internal power OK	48V	Green = 48 V PoE power OK	Fault	Red = PoE power fault	“H” LEDs	Green = 1000 Mbps communication established Yellow = 100 Mbps communication established	“L” LEDs	Yellow = 10 Mbps communication established	“H” or “L” LEDs	Flashing = data transmissions occurring
Power	Green = internal power OK												
48V	Green = 48 V PoE power OK												
Fault	Red = PoE power fault												
“H” LEDs	Green = 1000 Mbps communication established Yellow = 100 Mbps communication established												
“L” LEDs	Yellow = 10 Mbps communication established												
“H” or “L” LEDs	Flashing = data transmissions occurring												
Regulatory Compliance	CE Mark; CFR 47, Part 15 Class A; RoHS; UL 508, C22.2 No. 142-M1987 IEEE 802.3af												




RJ-45 Connector Pin Assignments

Pin	Function	PoE Power
1	BI_DA+	+48 VDC
2	BI_DA-	+48 VDC
3	BI_DB+	48 VDC Return
4	BI_DC+	
5	BI_DC-	
6	BI_DB-	48 VDC Return
7	BI_DD+	
8	BI_DD-	




Mechanical Drawing

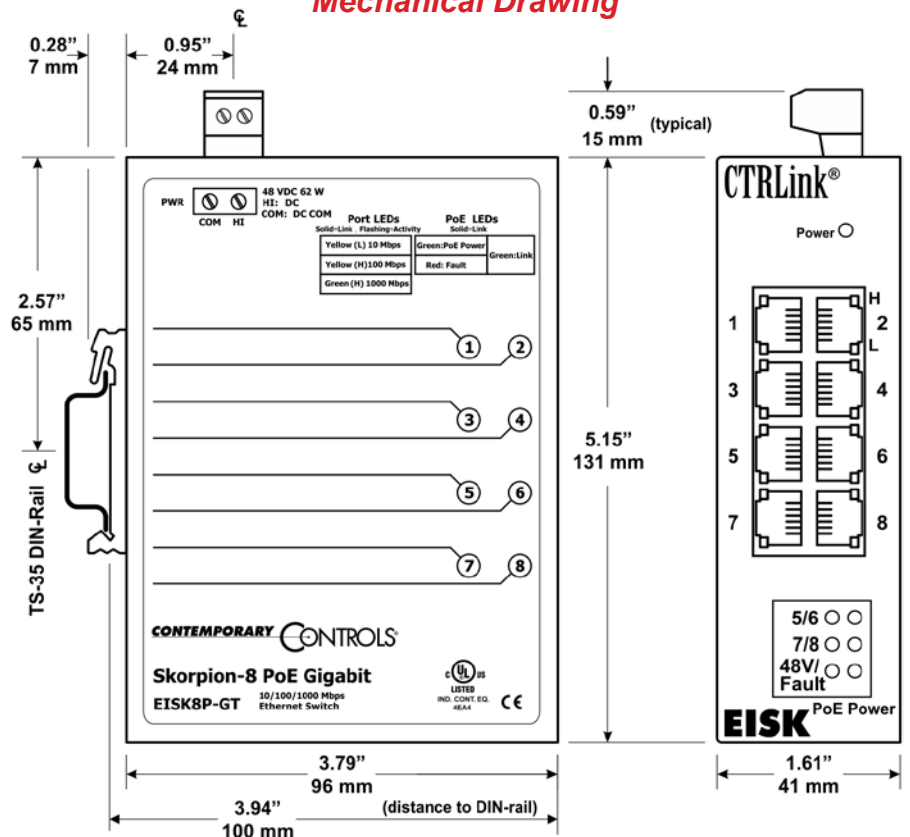

Power Considerations

Applied voltage must be in the specified range and deliver a current commensurate with power consumption. The recommended size for solid power conductors is 16–20 AWG; and for stranded conductors use 16–18 AWG. Both power input terminals are isolated from chassis (earth). Input connections are reverse-polarity protected. Input voltage should be sourced from an isolated Class 2 power supply in order to comply with the IEEE 802.3af and UL 508 specifications.

Typical Switch Installation

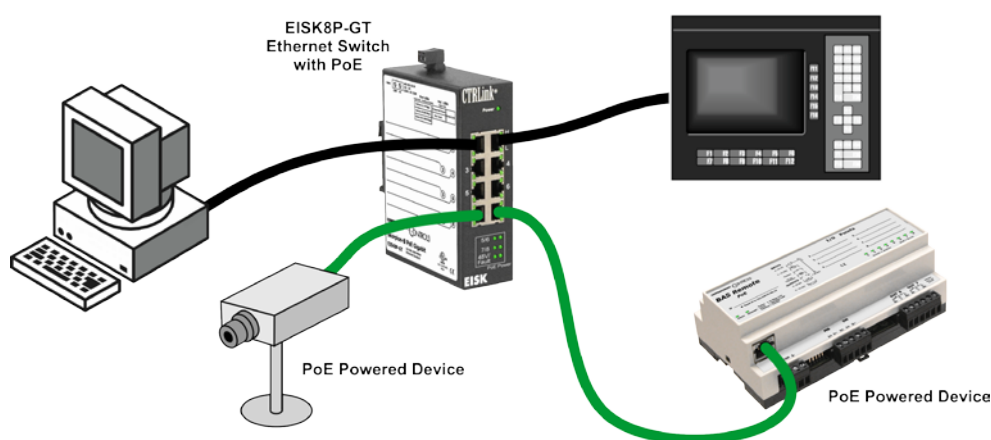

Ordering Information

Model	Description
EISK8P-GT	8-port 10/100/1000 Mbps Skorpion Ethernet switch with four PoE ports

United States

Contemporary Control Systems, Inc.
2431 Curtiss Street
Downers Grove, IL 60515
USA

Tel: +1 630 963 7070
Fax: +1 630 963 0109

info@ccontrols.com
www.ccontrols.com

China

Contemporary Controls (Suzhou) Co. Ltd
11 Huoju Road
Science & Technology
Industrial Park
New District, Suzhou
PR China 215009

Tel: +86 512 68095866
Fax: +86 512 68093760

info@ccontrols.com.cn
www.ccontrols.asia

United Kingdom

Contemporary Controls Ltd
14 Bow Court
Fletchworth Gate
Coventry CV5 6SP
United Kingdom

Tel: +44 (0)24 7641 3786
Fax: +44 (0)24 7641 3923

info@ccontrols.co.uk
www.ccontrols.eu

Germany

Contemporary Controls GmbH
Fuggerstraße 1 B
04158 Leipzig
Germany

Tel: +49 341 520359 0
Fax: +49 341 520359 16

info@ccontrols.de
www.ccontrols.eu